

DIN snelkoppelingen – 61 reeks DIN (ISO 5675) Raccords rapides DIN – 61 serie DIN (ISO 5675) DIN quick release couplings – 61 series DIN (ISO 5675)

DIN-koppelingen:


- ~ De DIN-snelkoppeling heeft een automatische afdichting bij het ontkoppelen. 2 mogelijke types van terugslagklep : kogelafdichting of de klassieke schotelklep.
- ~ Uitgevoerd in thermisch behandeld koolstofstaal, verzinkt en dichtingen uit NBR (-25°C tot +100°C) met teflon back-up ringen.

Raccords rapide DIN:

- ~ Le raccord DIN dispose d'une fermeture automatique lors du découplage, 2 types de clapets anti retour: clapet à bille ou clapet conique ("poppet")
- ~ Fabriqué en acier carbone traité à chaud, galvanisé et joints NBR (-25°C à +100°C).


DIN quick release couplings:


- ~ The DIN coupling has an automatic shut-off system with 2 possible types of check valves: a ball valve or a poppet valve.
- ~ Manufactured in carbon steel, heat treated, galvanized, NBR joints (-25°C to +100°C).

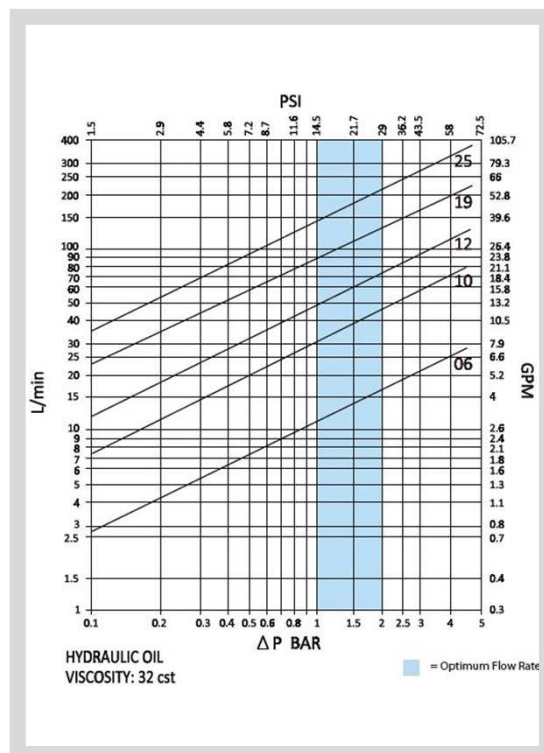

61..RP


VERZINKT STAAL | NBR
ACIER ZINGUÉ | NBR
GALVANISED CARBON STEEL | NBR

 NBR: -25°C TOT +100°C

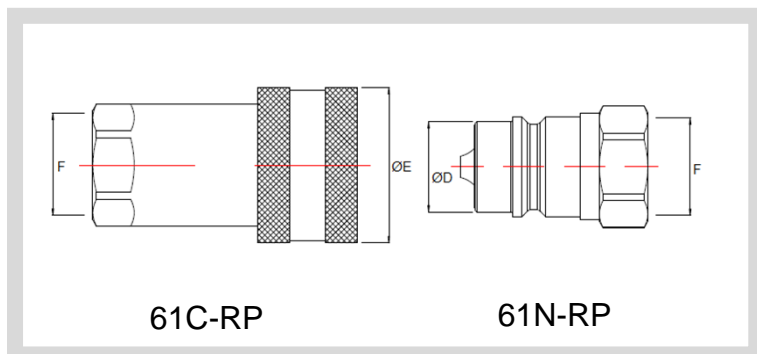


61C-RP


61N-RP

Vrouwelijk Femelle Female	Mannelijk Mâle Male	DN	F (BSP) (*)	ØE	ØD	
61C44RP	61N44RP	6	1/4"	27	14,2	400
61C66RP	61N66RP	10	3/8"	34	19	350
63C88RP	63N88RP	13	1/2"	38	20,5	250
61C1212RP	61N1212RP	20	3/4"	47	28	250
61C1616RP	61N1616RP	25	1"	52	31,3	250
61C2020RP	61N2020RP	32	1.1/4"	70	44	220
61C2424RP	61N2424RP	40	1.1/2"	84	53,5	200
61C3232RP	61N3232RP	50	2"	115	82	100

61..RP-BOL


VERZINKT STAAL | NBR
ACIER ZINGUÉ | NBR
GALVANISED CARBON STEEL | NBR


 NBR: -25°C TOT +100°C

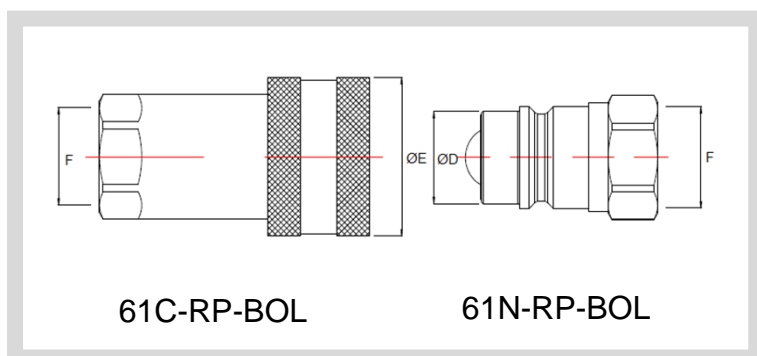

61C-RP-BOL

61N-RP-BOL


Vrouwelijk Femelle Female	Mannelijk Mâle Male	DN	F (BSP) (*)	ØE	ØD	
61C44RP-BOL	61N44RP-BOL	6	1/4"	27	14,2	300
61C66RP-BOL	61N66RP-BOL	10	3/8"	34	19	250
61C88RP-BOL	61N88RP-BOL	13	1/2"	38	20,5	200
61C1212RP-BOL	61N1212RP-BOL	20	3/4"	47	28	200
61C1616RP-BOL	61N1616RP-BOL	25	1"	52	31,3	200

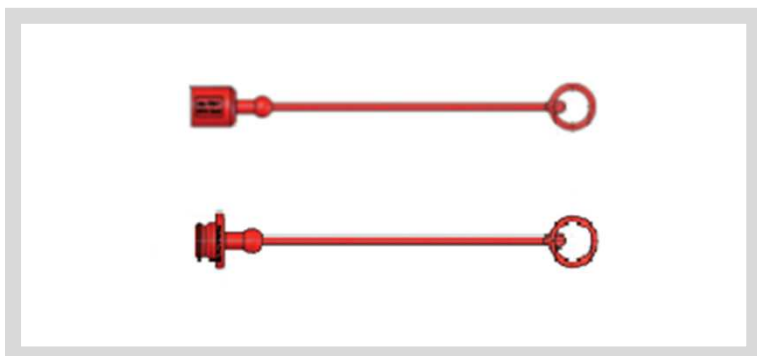

DUST CAPS : 61N..C

DUST PLUGS : 61C..P

Plug	Cap	DN				
61C4P	61N4C	6				
61C6P	61N6C	10				
63C8P	63N8C	13				
61C12P	61N12C	20				
61C16P	61N16C	25				

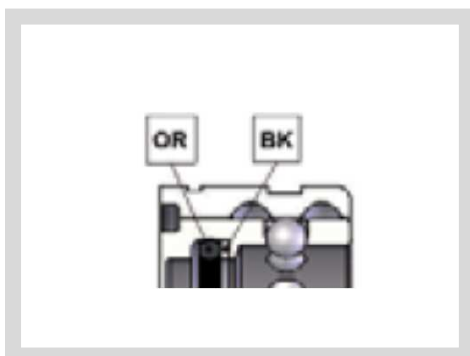

OR-..(SERIE61C)

OR = O-RING (NBR)
BK = BACK-UP RING (PTFE)

Set		DN				
OR-1/4"(SERIE61C)		6				
OR-3/8"(SERIE61C)		10				
OR-1/2"(SERIE63C)		13				
OR-3/4"(SERIE61C)		20				
OR-1"(SERIE61C)		25				