

Snelkoppelingen – TEMA reeks Raccords rapides – TEMA série Quick release couplings – TEMA series

Snelkoppeling:


- ~ Hoog debiet, lage drukval
- ~ Koppelbaar onder druk
- ~ Veilig blokkeersysteem (sleeve lock) die accidenteel ontkoppelen verhindert
- ~ Uitgevoerd in thermisch behandeld koolstofstaal, verzinkt en dichtingen uit NBR (-25°C tot +100°C)

Raccords rapide:

- ~ Haut débit, baisse de pression faible
- ~ Connexion sous pression autorisée
- ~ Système de blockage sécurisé évitant une déconnexion accidentelle
- ~ Fabriqué en acier carbone traité à chaud, galvanisé et joints NBR (-25°C à +100°C)


Quick release couplings:


- ~ High flow capacity, low pressure drop
- ~ Connection under pressure allowed
- ~ Secured blocking system avoiding accidental disconnection
- ~ Manufactured in carbon steel, heat treated, galvanized, NBR seals (-25°C to +100°C)

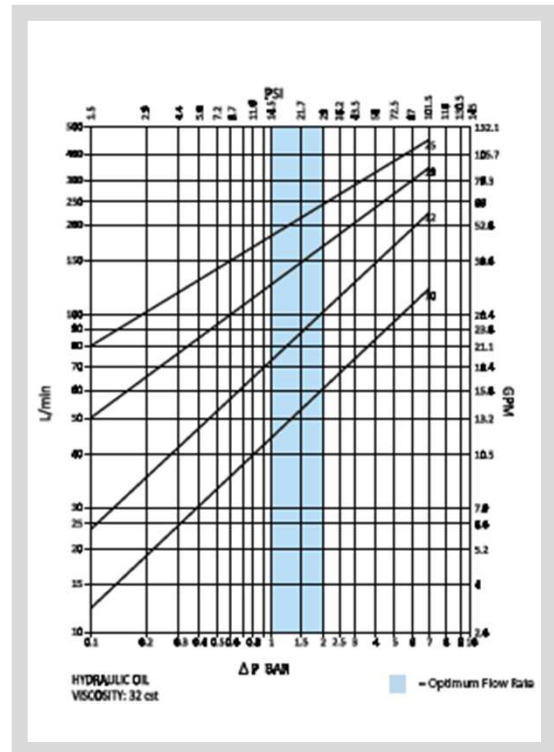


TEMA

VERZINKT STAAL | NBR
ACIER ZINGUÉ | NBR
GALVANISED CARBON STEEL | NBR

 NBR: -25°C TOT +100°C

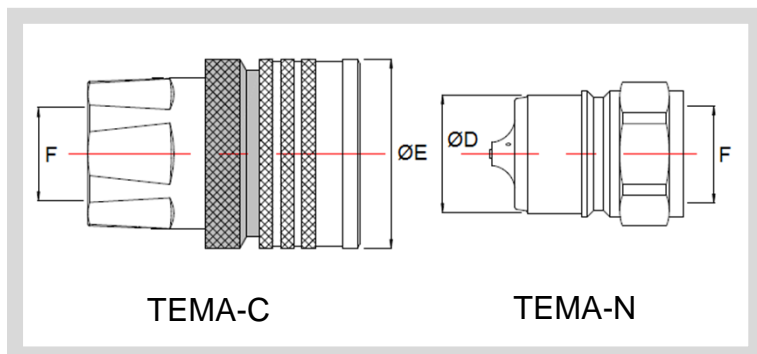

Vrouwelijk Femelle Female	Mannelijk Mâle Male	DN	F	ØE	ØD	
TEMA-C-66RP	TEMA-N-66RP	10	3/8"	35	19,9	350
TEMA-C-88RP	TEMA-N-88RP	13	1/2"	40	24,7	315
TEMA-C-1212RP	TEMA-N-1212RP	20	3/4"	52	32,6	300
TEMA-C-1616RP	TEMA-N-1616RP	25	1"	65	40,8	260