

Diagnose Snelkoppelingen – 80 reeks (ISO 15171-1) Coupleur Rapides Diagnostiques – série 80 (ISO 15171-1) Diagnostic Test Point Couplings – 80 series (ISO 15171-1)

Diagnose snelkoppeling:


- ~ Flatface safety locking sleeve
- ~ Druktesten van hydraulische systemen
- ~ Uitgevoerd in thermisch behandeld koolstofstaal, zink nikkel oppervlaktebehandeling en dichtingen uit NBR (-25°C tot +100°C)

Coupleur rapides diagnostiques:

- ~ Flatface safety locking sleeve
- ~ Tester de pneu dans des systèmes hydrauliques
- ~ Fabriqué en acier carbone traité à chaud, zinc nickel et joints NBR (-25°C à +100°C)


Diagnostic test point coupling:


- ~ Flatface safety locking sleeve
- ~ Pressure testing on hydraulic circuits
- ~ Manufactured in carbon steel, heat treated, zinc nickel plated, NBR seals (-25°C to +100°C)

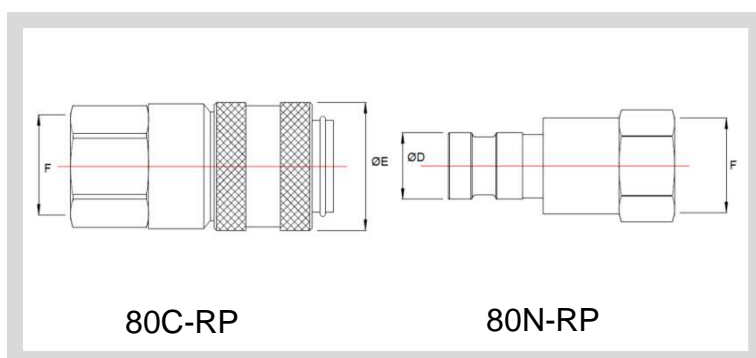

DIAGNOSE | ISO 15171-1

VERZINKT STAAL | NBR
ACIER ZINGUÉ | NBR
GALVANISED CARBON STEEL | NBR

 NBR: -25°C TOT +100°C

Vrouwelijk Femelle Female	Mannelijk Mâle Male	DN	F	ØE	ØD	
80C22RP	80N22RP	4	1/8 BSP	24,1	12,6	400
80C22F	80N22F	4	1/8 NPT	24,1	12,6	400
80C24RP	80N24RP	4	1/4 BSP	24,1	12,6	400
80C24F	80N24F	4	1/4 NPT	24,1	12,6	400
80C2-9/16UNF	80N2-9/16UNF	4	9/16 UNF	24,1	12,6	400